



HIGH-PERFORMANCE CABLE SOLUTION

## VERTEX-CT™ VC-C2-type Connector for up to 75kVDC



### APPLICATION

VERTEX-CT™ VC-C2-type is designed specifically for Computed tomography equipment applications.

### STANDARD

Enterprise standard for DC high-voltage cables for X-ray equipment.

### FEATURE


- Suitable for a variety of small diameter, high flexible cable types.
- Tinned copper braid shield, braid density up to 95%.
- High temperature resistance plug (and socket), only half of the conventional plug.
- Injection molding tail sleeve reduces bending stress of cable and prolongs service life.
- RoHS & REACH compliant.

## MAIN TECHNICAL DATA

SPECIFICATION	REQUIREMENTS
Cores	1
Rated Voltage	75kVDC
Maximum continuous operating temperature	100 °C

## DIAGRAM

VERTEX-CT™ VC-C2

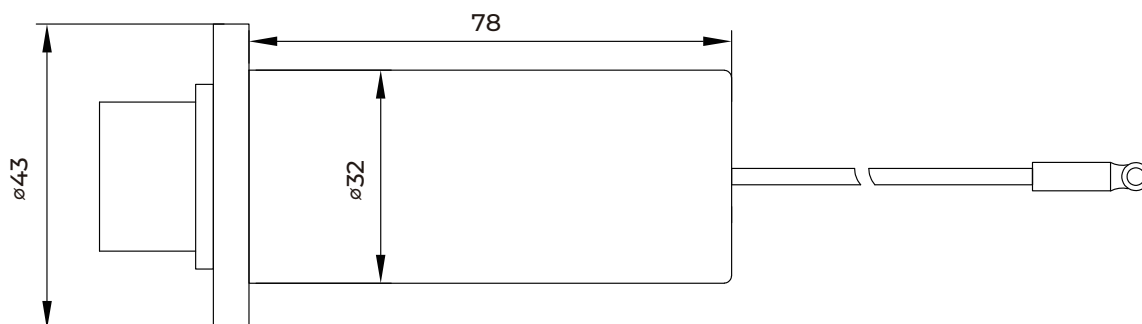

The VERTEX-CT™ VC-C2 connector can be adapted to the following types of cables

VERTEX-R™ VTX-R2(75kVDC)

VERTEX-R™ VTX-R3 (100kVDC)



HIGH-PERFORMANCE CABLE SOLUTION

TWB-Germany GmbH

Add: Kolonnenstr.8, 10827 Berlin, Germany

E-mail: rolf.kaiser@twb-germany.com

Tel: +49 171 5544253

URL: [www.twb-germany.com](http://www.twb-germany.com)

*The data in this document is for reference only. Contents in this document are subject to change without notice.*