



HIGH-PERFORMANCE CABLE SOLUTION

VERTEX-MG™ VC-M190 -type Connector for up to 60kVDC



APPLICATION

VERTEX-MG™ VC-M190 -type is designed specifically for Mammography equipment applications.

STANDARD

These assemblies comply with NEMA XR-7 standards.

FEATURE


- High flexibility cable: When the bending radius is 5D, the bending torsion is 100,000 times.
- Tinned copper braid shield, braid density up to 95%.
- Very high insulation resistance.
- RoHS & REACH compliant.

MAIN TECHNICAL DATA

SPECIFICATION	REQUIREMENTS
Core	1
Rated Voltage	60kVDC
Test Voltage(High voltage Insulation)	75kVDC/15min
Maximum Conductor Current	25A
Maximum continuous operating temperature of plug housing	100 °C

DIAGRAM

VERTEX-MG™ VC-M190

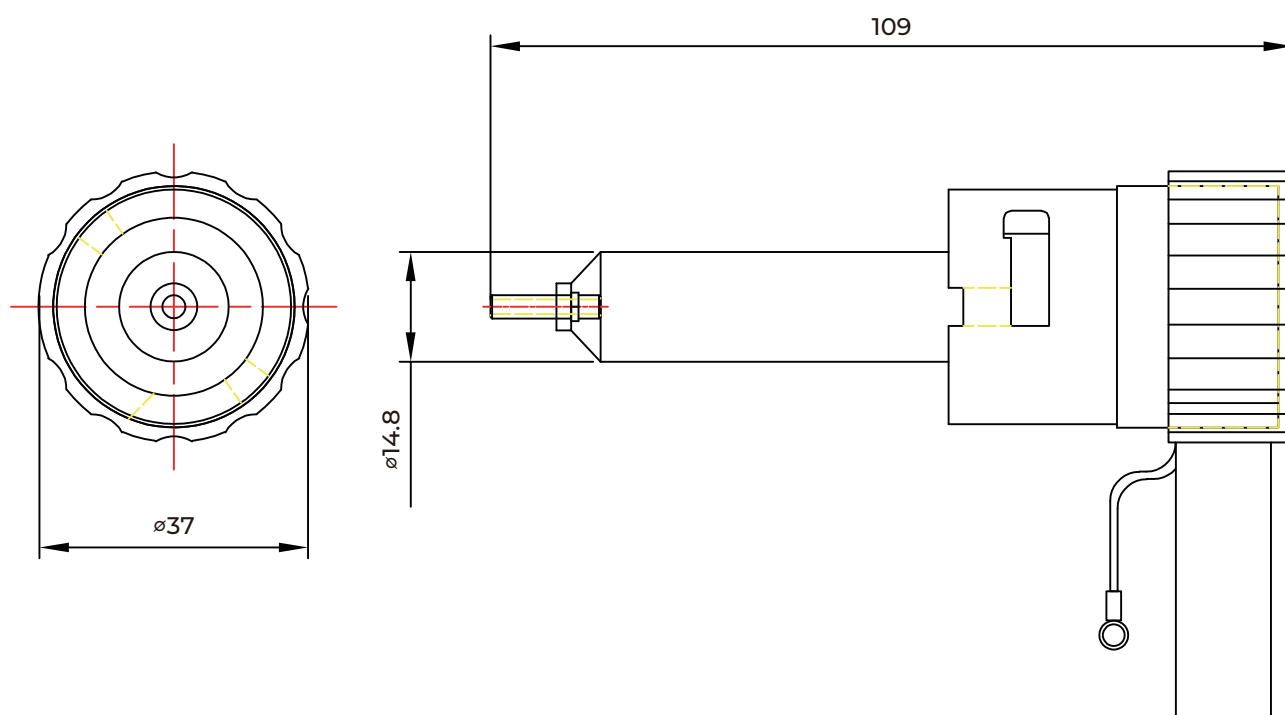

The VERTEX-MG™ VC-M190 connector can be adapted to the following types of cables
 VERTEX-MG™ VTX-M1(60kVDC)



HIGH-PERFORMANCE CABLE SOLUTION

TWB-Germany GmbH

Add: Kolonnenstr.8, 10827 Berlin, Germany

E-mail: rolf.kaiser@twb-germany.com

Tel: +49 171 5544253

URL: www.twb-germany.com

The data in this document is for reference only. Contents in this document are subject to change without notice.