

## VERTEX-N™ VC-N190SL-type Connector for up to 225kVDC



### APPLICATION

VERTEX-N™ VC-N190SL-type is designed specifically for Industrial NDT equipment applications.

### STANDARD

Enterprise standard for DC high-voltage cables for X-ray equipment.

### FEATURE

- Connectors are available in straight and right Angle types.
- Select small diameter, high flexibility cable.
- High temperature plug.
- High quality EP rubber with very smooth cone.
- Small diameter sleeve fixed with diaphragm clamp.
- The plug is made of high insulating rubber and can be used with various types of cable flanges.
- When attaching the plug to its receptacle, the rubber cone must be coated with silicone grease to prevent high voltage arcing along the connector surface.
- RoHS & REACH compliant.


## MAIN TECHNICAL DATA

SPECIFICATION	REQUIREMENTS
Cores	3
Rated Voltage *	225kVDC
Maximum continuous operating temperature	90 °C

\* The value depends on the cable type

## DIAGRAM

VERTEX-N™ VC-N190SL

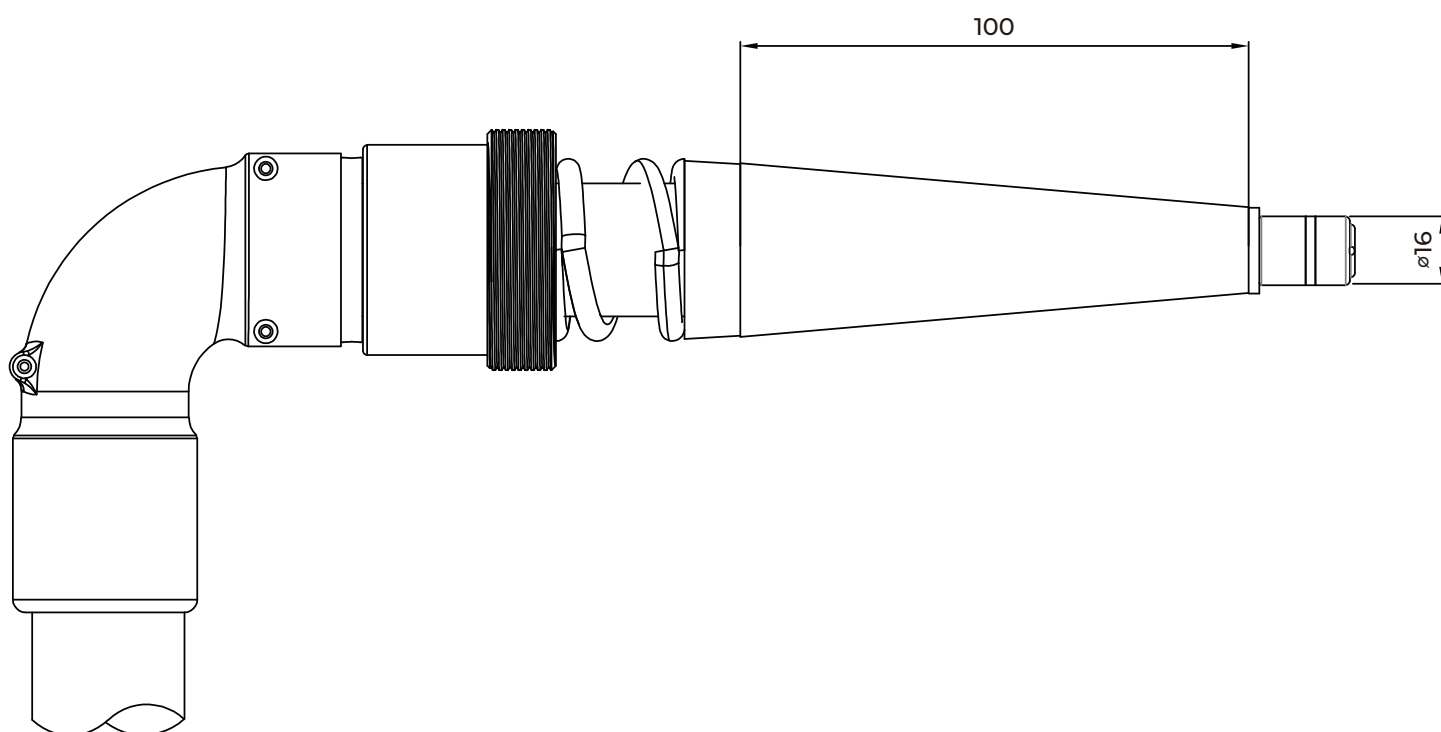

The VERTEX-N™ VC-N190SL connector can be adapted to the following types of cables

- VERTEX-R™ VTX-R3 (100kVDC)
- VERTEX-N™ VTX-N1(160kVDC)
- VERTEX-N™ VTX-N2(250kVDC)



HIGH-PERFORMANCE CABLE SOLUTION

Twb-Germany GmbH

Add: Kolonnenstr.8, 10827 Berlin, Germany

E-mail: [rolf.kaiser@twb-germany.com](mailto:rolf.kaiser@twb-germany.com)

Tel: +49 171 5544253

URL: [www.twb-germany.com](http://www.twb-germany.com)

The data in this document is for reference only. Contents in this document are subject to change without notice.