


## VERTEX-R™ VC-R4-type Connector for up to 100kVDC

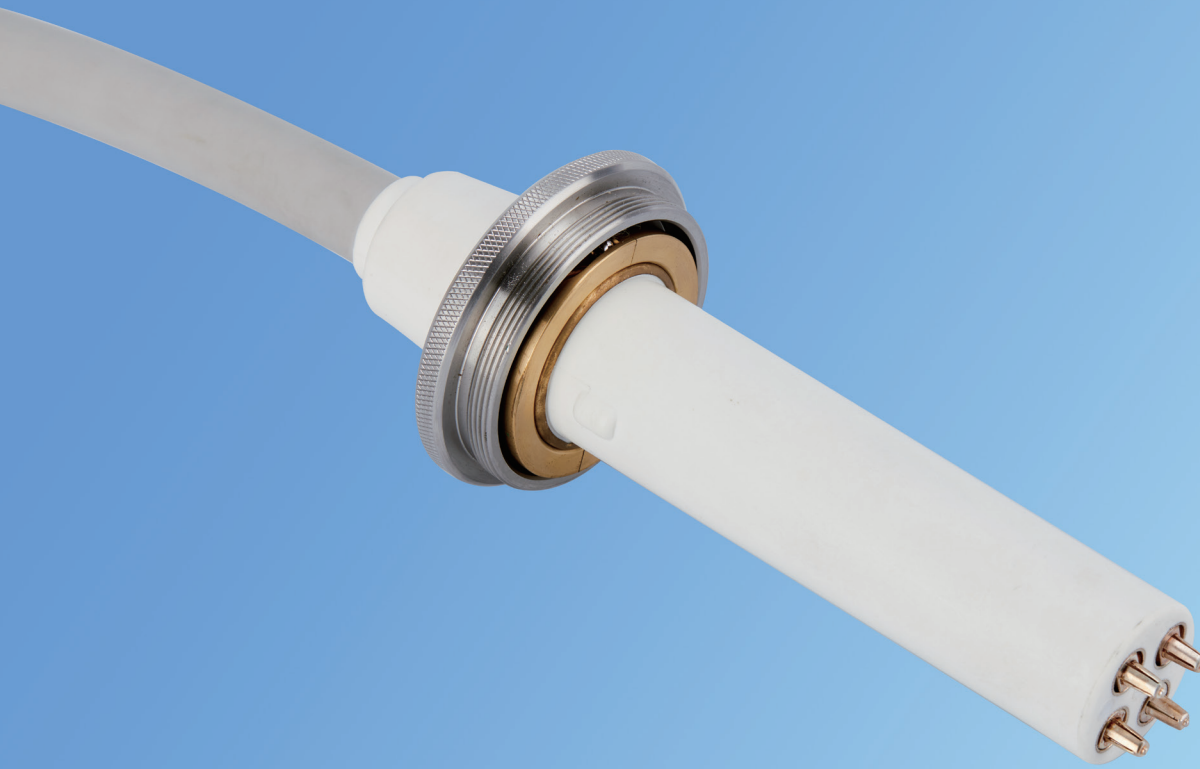

### APPLICATION

VERTEX-R™ VC-R4-type is designed specifically for General Radiography equipment applications.

### STANDARD

Enterprise standard for DC high-voltage cables for X-ray equipment.

### FEATURE

- Suitable for a variety of small diameter, high flexible cable types.

- Tinned copper braid shield, braid density up to 95%.
- Replaceable spring pin, optional silicone gasket.
- Cable assembly is easy to assemble.
- Ring nut: Thread specification 2 1/2-20UN, accessories can be customized.
- Cable tail sleeve reduces cable bending stress and prolongs cable life.
- RoHS & REACH compliant.


## MAIN TECHNICAL DATA

SPECIFICATION	REQUIREMENTS
Cores	4
Rated Voltage	75kVDC/100kVDC
Maximum continuous operating temperature	100 °C

\* The value depends on the cable type.

## DIAGRAM

### VERTEX-R™ VC-R4

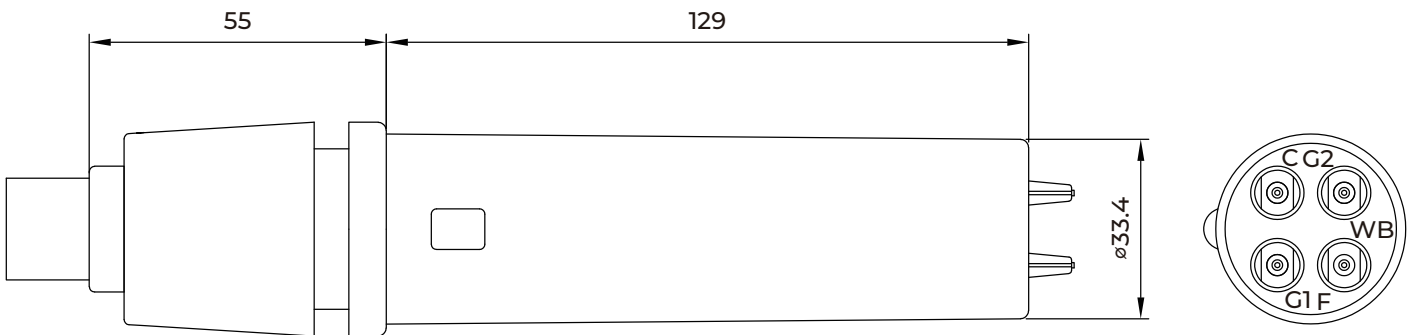

The VERTEX-R™ VC-R4 connector can be adapted to the following types of cables

VERTEX-R™ VTX-R4(75kVDC)

VERTEX-R™ VTX-R5(75kVDC)

VERTEX-CT™ VTX-C1(75kVDC)



HIGH-PERFORMANCE CABLE SOLUTION

TWB-Germany GmbH

Add: Kolonnenstr.8, 10827 Berlin, Germany

E-mail: rolf.kaiser@twb-germany.com

Tel: +49 171 5544253

URL: [www.twb-germany.com](http://www.twb-germany.com)

The data in this document is for reference only. Contents in this document are subject to change without notice.