




HIGH-PERFORMANCE CABLE SOLUTION

VERTEX-R™ VTX-R5-type 75kVDC rated High Voltage Cable

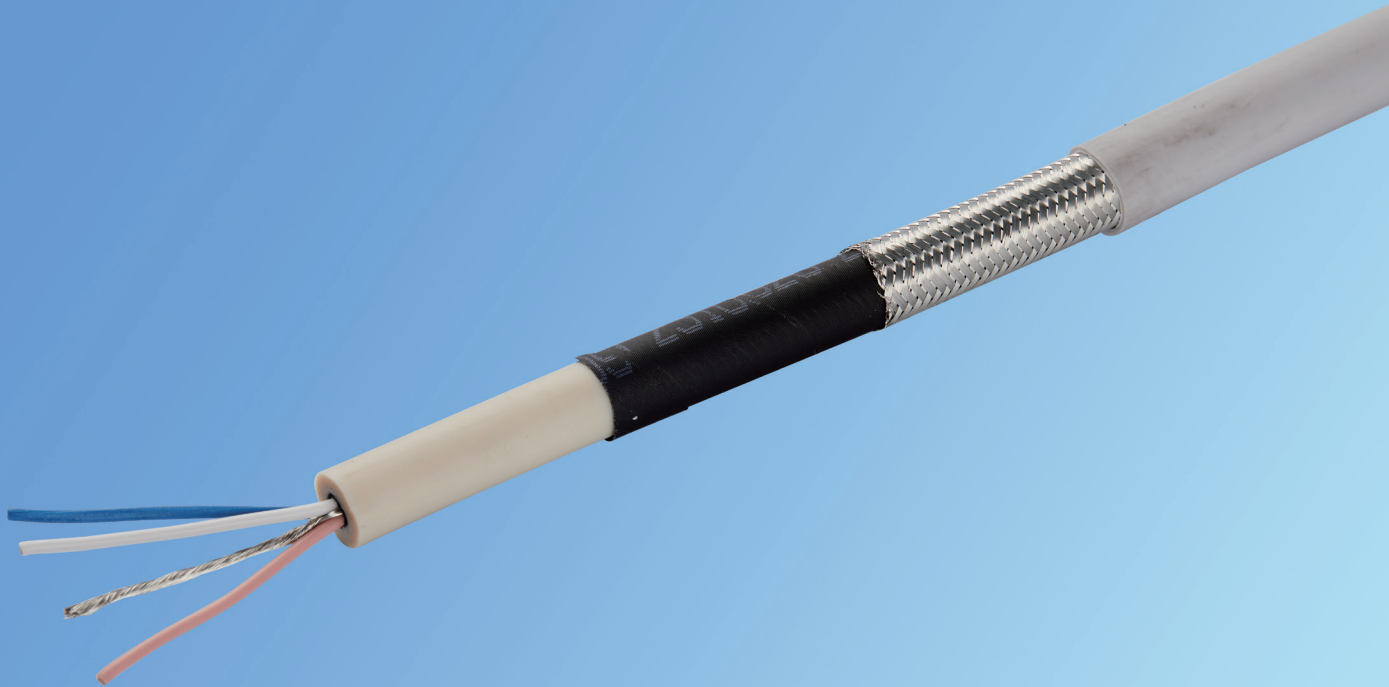

APPLICATION

The VERTEX-R line is designed specifically for Radiographic X-ray applications such as standard X-ray, computed tomography and angiography equipment.

STANDARD

Enterprise standard for DC high-voltage cables for X-ray equipment.

FEATURE


- High flexibility.
- Small diameter
- 95% cable shield braid density
- RoHS & REACH compliant.

MAIN TECHNICAL PARAMETER

SPECIFICATION	REQUIREMENTS
Rated Voltage	75kVDC
General test voltage (high voltage insulation)	120kVDC/10min
Rated voltage (wire insulation)	2kVAC
Maximum conductor current	15A
Nominal diameter	16.5±0.5mm
Insulation resistance of conductor core to shielding at 20 °C	≥1×10 ¹² Ω·m
(White、 Red) Conductor resistance DC at 20 °C	11.9mΩ/m±10%
(Blue) Conductor resistance DC at 20 °C	37.1mΩ/m±10%
Bare ground wire resistance DC at 20 °C	8.9mΩ/m±10%
Capacitance between conductor and shield	150±15pF/m
Minimum static bending radius	<42mm
Minimum dynamic bending radius	<84mm
The cable has undergone 100000 bending and twisting cycles	normal operation
Transport and storage temperatures	-40 °C~+70 °C
Operating temperature	-10 °C~+70 °C
Net weight	338kg/km

DIAGRAM

VERTEX-R™ VTX-R5

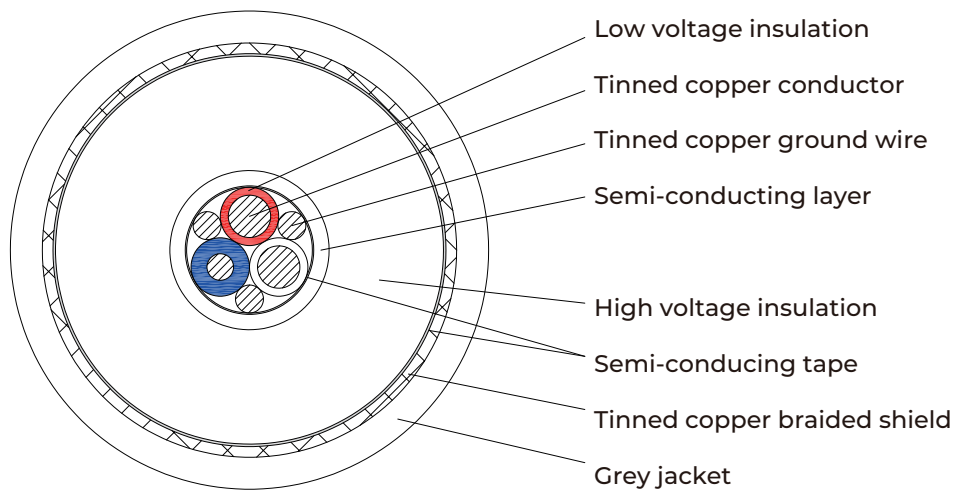

White and red insulation is 1.5mm²,The blue insulation is 0.5mm²,The ground wire is 1.5mm².



HIGH-PERFORMANCE CABLE SOLUTION

TWB-Germany GmbH

Add: Kolonnenstr.8, 10827 Berlin, Germany

E-mail: rolf.kaiser@twb-germany.com

Tel: +49 171 5544253

URL: www.twb-germany.com

The data in this document is for reference only. Contents in this document are subject to change without notice.