

VERTEX-A™ VC-A190-type Connector for up to 100kVDC



APPLICATION

VERTEX-A™ VC-A190-type is designed specifically for Angiography equipment applications.

STANDARD

Enterprise standard for DC high-voltage cables for X-ray equipment.

FEATURE

- Suitable for a variety of small diameter, high flexible cable types.


- Tinned copper braid shield, braid density up to 95%.
- Replaceable spring pin, optional silicone gasket.
- Cable assembly is easy to assemble.
- Ring nut: Thread specification 2 1/2-20UN, accessories can be customized.
- Cable tail sleeve reduces cable bending stress and prolongs cable life.
- RoHS & REACH compliant.

MAIN TECHNICAL DATA

SPECIFICATION	REQUIREMENTS
Core	5
Rated Voltage	75kVDC
Maximum continuous operating temperature	100 °C

DIAGRAM

VERTEX-A™ VC-A190

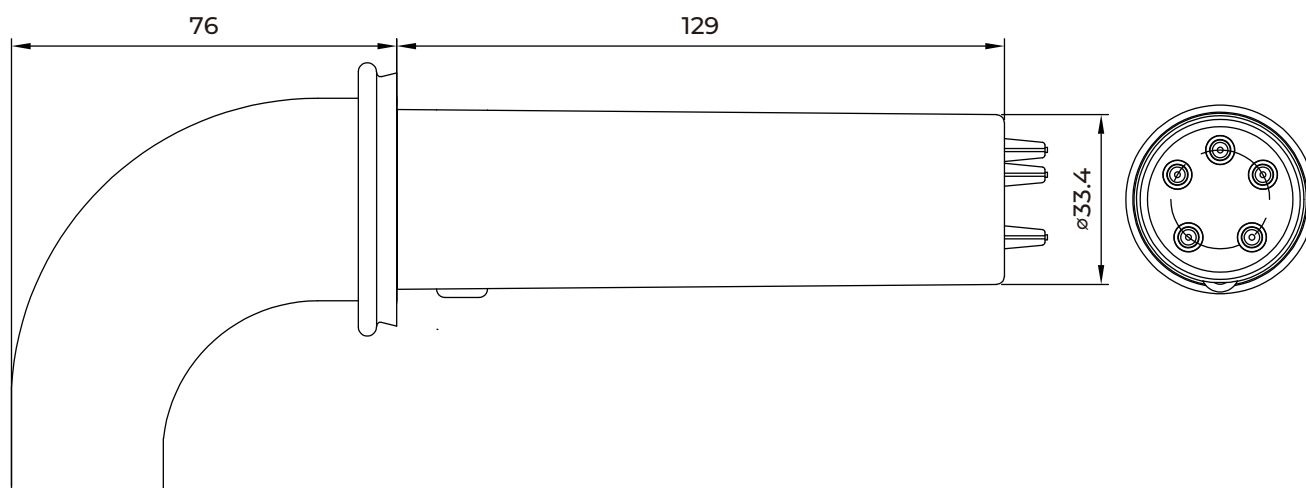

The VERTEX-A™ VC-A190 connector can be adapted to the following types of cables
VERTEX-A™ VTX-A1(75kVDC)



HIGH-PERFORMANCE CABLE SOLUTION

TWB-Germany GmbH

Add: Kolonnenstr.8, 10827 Berlin, Germany

E-mail: rolf.kaiser@twb-germany.com

Tel: +49 171 5544253

URL: www.twb-germany.com

The data in this document is for reference only. Contents in this document are subject to change without notice.